

Mobile paint-spray extraction unit **MiniMax F 300**



Schuko

Dust extraction and filter technology

Mobile paint-spray extraction unit MiniMax Type F 300

The energy-saving and inexpensive paint-spray aspiration unit from Schuko offers you the advantages of a stationary system, without being bound to a particular location.

The two level filtration process ensured a high separation efficiency (includes fine dust filter mat following ISO ePM10 50%).

The stable, self-supporting structure is secured against tilting on top of the solid chassis.


There is no reason to waive a paint-spray aspiration unit for occasional painting works, pickling or evaporating due to cost or space reasons.

Your health will thank you for it.

MiniMax	Type F 300
Item No.	517600
Air capacity	3,500 m³/h, 750 PA
Dimensions L x B x H	1,250 x 820 x 1,460 mm
Motor power	1.5 kW, 400 V, 50 Hz
Weight	140 kg
Air baffles	optional
Equipment incl. <ul style="list-style-type: none">• Supply line 7 m• Motor protection plug (to be placed outside of the ATEX zone) <p>Regarding placement and exhaust air conduction please consult DGUV 209-046 of the Berufsgenossenschaft Holz und Metall (professional association for wood and metal) (BGHM, as per 08/2016)</p>	

The compact and reasonable prices paint-spray extraction system

Saving energy
benefits the
environment
and your wallet.

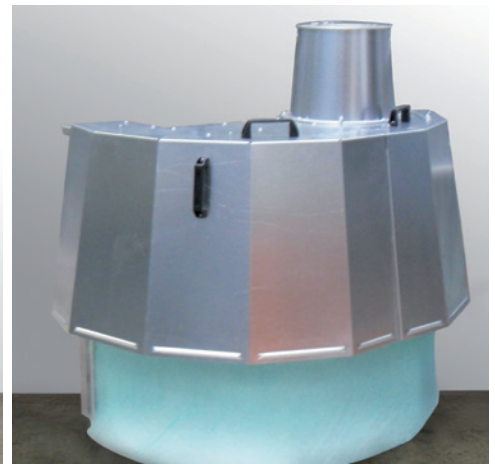

air baffles are optional



Schuko International GmbH & Co. KG
Heinrich-Schulte-Südhoff-Straße 1
14959 Trebbin, Germany
☎ +49 (0) 33731 / 7777-94

international@schuko.com
www.schuko.com